

F-2000MRH-C

MODULAR CUBELET ICE MACHINE

Item # _____

Project: _____

Qty: _____

*AutoCad available on KCL

F-2000MRH-C

10/10

Item # 13235


CUBELET DIMENSIONS

W x D x H


F-2000MRH-C
30 x 27^{1/2} x 34^{7/16}




B-500



B-700



B-800




B-900

Also available on Large Bins:
B-1150SS
B-1300SS
B-1500SS
B-1650SS



F-2000MRH-C

Remote Air-Cooled
Shown on an optional
B-900

- Up to 1715 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- CleanCycle I2® Design 
- 15 minute flush cycle every 12 hours
- Removes sediment
- Cleaner ice
- Longer life and easy maintenance
- R-404A Refrigerant



Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Three Year - Parts & Labor on entire machine. (Serial numbers VxxxxxJ and after.)

Five Year - Parts on: Compressor, air-cooled condenser.



F-2000MRH-C MODULAR CUBELET ICE MACHINE

DIMENSIONS
W x D x H
F-2000MRH-C
30 x 27^{1/2} x 34^{7/16}

• Remote Air-cooled

REMOTE AIR-COOLED

| Water Temp° F. | 50° | 70° | 90° | |
|----------------|-----|------|------|------|
| Air Temp° F. | 70° | 1715 | 1660 | 1630 |
| | 80° | 1595 | 1560 | 1530 |
| | 90° | 1500 | 1490 | 1435 |

UTILITY CONSUMPTION


| Model Number | KWH per 100 LBS. 90/70 | Potable Water Gal. per 100 lbs. |
|--------------|------------------------|---------------------------------|
| F-2000MRH-C | 4.6 | 12.0 |

SPECIFICATIONS


| Model Number | Amperage | Min. Circuit Ampacity | Shipping Weight |
|--------------|----------|-----------------------|-----------------|
| F-2000MRH-C | 19.4 | 30 | 360 lbs. |

STORAGE BINS


| Model Number | Application Capacity | ARI-Rated Capacity |
|--------------|----------------------|--------------------|
| B-500 | 500 lbs. | 360 lbs. |
| B-700 | 700 lbs. | 550 lbs. |
| B-800 | 800 lbs. | 600 lbs. |
| B-900 | 900 lbs. | 660 lbs. |
| B-1150 | 1150 lbs. | N/A |
| B-1300 | 1275 lbs. | N/A |
| B-1500 | 1490 lbs. | N/A |
| B-1650 | 1605 lbs. | N/A |




FRONT VIEW




LEFT SIDE VIEW



RIGHT SIDE VIEW




ICE DROP ZONE

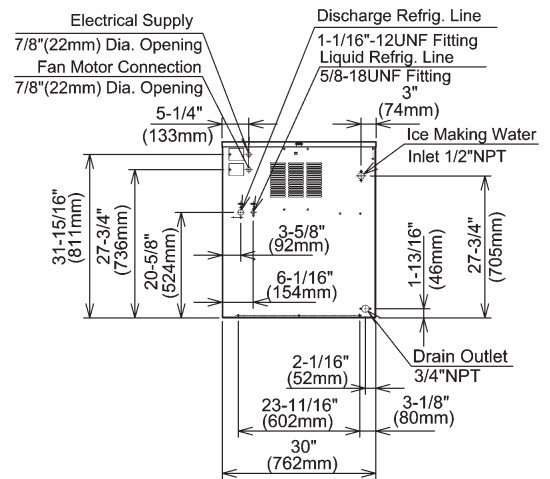

REMOTE AIR-COOLED UNIT

URC-22F Remote Condenser (Sold Separately)
For Use with F-2000MRH-C

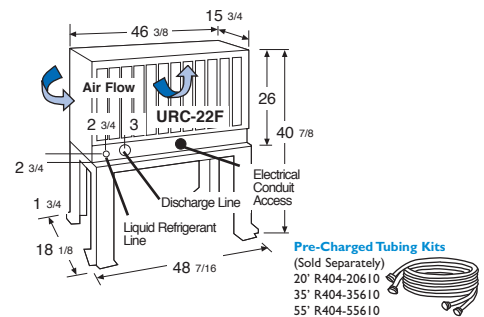

Pre-Charged Tubing Kits (Sold Separately)
20' R404-20610
35' R404-35610
55' R404-55610

Voltage supply for the URC Remote Condenser is supplied from the Ice Maker. No additional circuit is required.

ELECTRICAL & PLUMBING/F-2000MRH-C

- 208-230/60/1 (3 wire dedicated neutral for 115V)
- 3/8" OD copper or equivalent independent water supply
- 3/4" FPT independent drain connection



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 187 - 253V

SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filter.

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

