

FS-1500MLH-C

SERENITY SERIES

CUBELET ICE MACHINE

Item # _____

Project: _____

Qty: _____

*AutoCad available on KCL

FS-1500MLH-C

8/11

Item # 13288

CUBELET DIMENSIONS

W x D x H

FS-1500MLH-C
30 x 16^{1/2} x 33

CONDENSING UNIT DIMENSIONS

W x D x H

Installation Dimension
SRC-14H


37^{5/8} x 25^{1/2} x 37^{*}
*with legs

Actual Dimension
SRC-14H

35^{5/8} x 21^{1/2} x 22



FS-1500MLH-C
Remote Air-Cooled
Shown

- Up to 1491 lbs. of ice production per 24 hours
- Less heat in the kitchen
- Minimized noise
- No wires between units
- Durable stainless steel exterior
- Produces ideal chewable cubelet ice
- Ice removed from evaporator after every shut down cycle
- Advanced CleanCycle I2® Design 
- Flushes every 2 hours to remove sediment and improve efficiency
- Dispenser ready / infrared bin control
- Slim depth - easier to clean dispenser
- R-404A Refrigerant



ISO9001-15014E01

Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Three Year - Parts & Labor on entire machine. (Serial numbers VxxxxxJ and after.)

Five Year - Parts on compressor.



FS-1500MLH-C CUBELET ICE MACHINE SERENITY SERIES

DIMENSIONS

W x D x H

FS-1500MLH-C

30 x 16^{1/2} x 33

Installation Dimension

SRC-14H

37^{7/8} x 25^{1/2} x 37^{*}

*with legs

Actual Dimension

SRC-14H

35^{5/8} x 21^{7/8} x 22

REMOTE AIR-COOLED


Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	1491	1444	1383
80°	1324	1268	1215
90°	1163	1165	1067

UTILITY CONSUMPTION


Model Number	Approximate Electrical		KWH per 100 LBS.		Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.
	90/70	70/50	90/70	70/50		
FS-1500MLH-C with SRC-14H	2122	2097	4.51	3.75	12	N/A

SPECIFICATIONS


Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
FS-1500MLH-C	Remote Air-Cooled	15	15	222 lbs.
SRC-14H	Air-Cooled	20	20	235 lbs.




FRONT VIEW

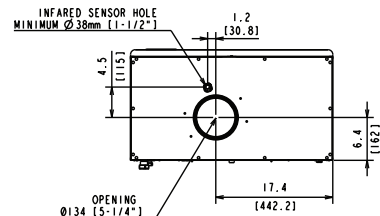

ICE DROP ZONE




SIDE VIEW

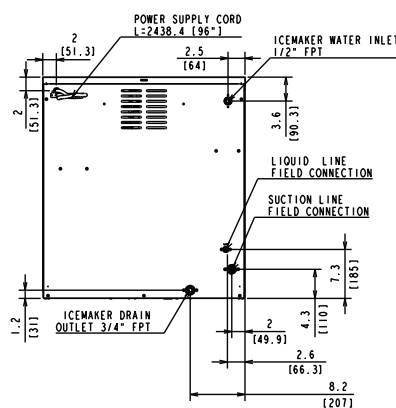


BACK VIEW

SRC-14H Remote Condensing Unit (Sold Separately)

For Use with FS-1500MLH-C

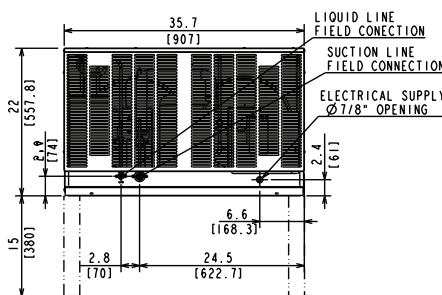

FRONT VIEW

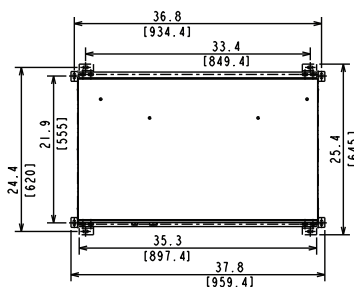

TOP VIEW

Pre-Charged Tubing Kits

- (Sold Separately)
- 20' R404-20610
 - 35' R404-35610
 - 55' R404-55610

ELECTRICAL & PLUMBING / FS-1500MLH-C

- 115-120V/60/1
- 15 amp Max Fuse/HACR Breaker Size
- 1/2" FPT copper or equivalent independent potable water supply
- 3/4" FPT independent drain connection

CONDENSING UNIT / SRC-14H

- 208-230V/60/1
- 20 amp Max Fuse/HACR Breaker Size

OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V

CONDENSING UNIT

- Voltage Range 187 - 253V
- Ambient Temp Range -4 - 122°F

SERVICE

- Panels easily removed and all components accessible for service.
- No wires between units
- Pump down cycle



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

